



# CENTRAL AIR CASSETTE TYPE

เครื่องปรับอากาศ เซ็นทรัลแอร์ แบบติดเพดาน



## N SERIES

- ประหยัดไฟเบอร์ 5
- แผ่นกรองอากาศ Pre filter
- มีระบบ Auto Restart
- รูปทรงสวยงาม ทันสมัย
- มีน้ำยาในระบบแล้ว (R22), ติดตั้งง่าย
- รีโมทคอนโทรลมีสายแบบดิจิตอล และแบบไร้สาย



Pre Filter



Error Code Display



Powerful Dehumidification



Dehumidifying



Turbo Button



Auto Swing



Auto Restart



High Durability



LED Display



24h Timer



ผ่านการรับรองตามมาตรฐาน

ISO 9001 : 2015, ISO 14001 : 2004, OHSAS 18001 : 2007




# เครื่องปรับอากาศ เซ็นทรัลแอร์ แบบติดเพดาน

## Central Air Cassette Type

**N** SERIES

### SPECIFICATIONS

Model	CFC-N	12	16-20	25-28	33-38	44-48	56-63
AIR FLOW	CFM.	410	605	850	1210	1600	1600
COOLING CAPACITY	BTU/Hr.	12500	16300-20400	25600-28500	33600-38300	44100-48000	56200-63400
POWER SOURCE	V/PH/HZ	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50
EVAPORATOR COIL	TYPE	ALUMINUM COATED FINS AND COPPER TUBE ON 3/8 in OD					
BLOWER	TYPE	FORWARD CURVE CENTRIFUGAL BLOWER					
QUANTITY	NO.	1					
3 SPEED BLOWER MOTOR	TYPE	PERMANENT SPLIT CAPACITOR WITH OVERLOAD					
HORSE POWER EACH	W.	37	37	116	116	116	116
FULL LOAD Amp. EACH	A.	0.44	0.44	1.28	1.28	1.28	1.28
QUANTITY	NO.	1					
DIMENSION (CM.) BODY / DIFFUSER	H.	29 / 2	29 / 2	29 / 4	29 / 4	29 / 4	29 / 4
	W.	58 / 62.5	58 / 62.5	84 / 88	84 / 88	84 / 88	84 / 88
	D.	58 / 62.5	58 / 62.5	84 / 88	84 / 88	84 / 88	84 / 88
UNIT WEIGHT	kg	22	22	47	51	51	51
DRAIN PIPE	inch OD	3/4	3/4	3/4	3/4	3/4	3/4

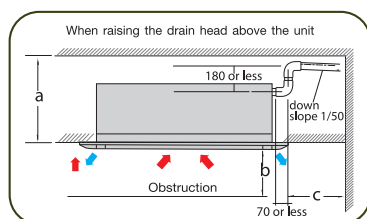

- a) Above ceiling space distance 300 mm. or more.
- b) Vertical distance away from obstruction, 1000 mm. or more.
- c) Horizontal distance away from boundaries, 1000 mm. or more.